
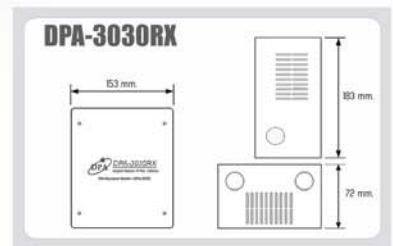


# DPA-3030RX/3100RX/3100RXL

## Digital Sound Matrix Public Address System - Receiver

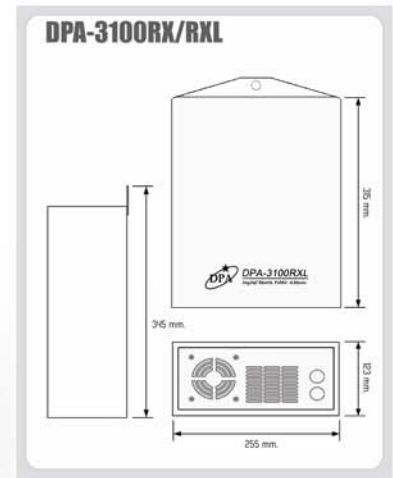

### Specification

#### RECEIVER UNIT :

Performane	DPA-3030RX	DPA-3100RX	DPA-3100RXL
Power Amplifier	30 W.	100 W.	100 W. + Line volt
Bass boost/cut		+ 8 dB @ 100 Hz	
Treble boost/cut		+ 8 dB @ 10 kHz	
Frequency response		50 Hz - 20 kHz , 3 dB	
Distortion at rate output		< 0.5%	
Signal to noise ratio		> 80 dB	
LED status display		Yes.	
Main supply		AC 220-230 V/50 Hz (in-Out)	
Power consumption	40 VA	110 VA	110 VA
Operating temperature range		-10 ºC to 50 ºC	
Storage temperature range		-40 ºC to 70 ºC	
Relative humidity		< 95%	
Weather proof	No.	Yes	Yes
Weight (Approx)	3.5 kg.	6 kg.	6.5 kg.
Dimensions	180X 153X 73mm	250X 315X 120mm	